



Thank You

Grazie

謝謝

Вы

Gracias

Спасиби

Merci

# Archery—It's What You Do.



"When I stepped into the role of president here at Easton two years ago, I was excited to be a part of the first name in archery. Everyday, I get to work with top shooters and employees who are passionate about the sport. Feedback from the archery athlete is a critical part of our strategy to move forward and drives the 91-year legacy of relentless innovation. Our goal is to make the most advance and accurate products in the world, because at the end of the day, our focus is to help you become a better archer. Thank you for being part of the Easton target archery family."

**Shane Michelli**

President



"Traveling the world and watching archers perform has to be one of the greatest jobs there is. I'm proud to part of the Easton team. See you at a tournament somewhere soon!"

**Dean Alberga**



"Today's archer demands the highest level of commitment from themselves and expects no less from their arrows and the company that produces them. I'm proud to be part of a company that continually strives to exceed these expectations."

**Jeff Howard**



"Easton is pure performance. Whether I'm hunting at 14,000 feet or going for the 14-ring in 3D, the last thing I worry about is the accuracy of my Easton Arrows. Good shooting!"

**Shawn Monsen**





ありがとう

Thank You

Danke

감사하십시오

Obrigado

Dank u



*Jim Easton & Silver Olympic Medalists; Brady Ellison Jacob Wukie & Jake Kaminski*



"Hours of sacrifice and time spent away from family means archers require the best equipment when their tournament dreams are on the line. It's gratifying to work and shoot for a company that reaches for these high standards."

**Logan Wilde**



"When Easton says 'nothing else comes close' that's a promise. Jim Easton taught me that ethic more than 20 years ago and I still think about it each day, whether I'm teaching archery in Japan, shooting in Germany, or sitting with fellow engineers in a design session. It's the Easton way. And it's what makes it a privilege to work for the finest name in archery."

**George Tekmitchov**

WORLD ARCHERY



A male archer with dark hair, wearing a white long-sleeved shirt, is shown in a focused pose, aiming a bow. The bow is yellow and black. The background is blurred, showing a crowd of spectators.

**4 YEARS+**  
**1,400 PRACTICE DAYS+**  
**25,000 KILOMETERS OF ARROW FLIGHT+**  
**300,000 SHOTS TAKEN+**  
**16,650,000 LBS. OF BOW WEIGHT PULLED**



"X10 is the world's best arrow. With X10, I won the first men's individual Archery Gold Medal in Korean Olympic history. Every Olympic Gold title has been won by X10 athletes since it was introduced in 1996. Every Korean shooter reaching the national level or above shoots X10. For archery's top shooters, nothing can match the X10."

**Oh, Jin-hyek**

*2012 Olympic Gold Medalist*



About QR Codes  
QR codes are featured throughout the 2013 Easton catalog, allowing you to access additional information using a smartphone. Free QR code readers are available for all smartphone operating systems on App portals. This feature allows you direct access to great features such as shooter quote translations, interviews, and more special content exclusively for Easton shooters.



# ONE GEN10 ATHLETE



**Team GenX10 dominated the 2012 Summer Games by taking every Gold, Silver, and Bronze archery title in London with X10 arrows. GenX10 archers have used their skills to make the podium in each of the five Olympic Games since the debut of the ultra-micro diameter, barreled X10.**

**Join the X10 Generation and be part of GEN10 —the most winning archery athletes in the world.**



# X10<sup>®</sup>

X10 shafts have been used to win more Olympic and World Championship titles than any other archery product ever. It's the ultimate target shaft.

- High-strength carbon fiber bonded to a 7075 alloy core
- 9-micron polished carbon finish
- Guaranteed straightness:  $\pm .0015''$
- Weight tolerance:  $\pm 0.5$  grains
- Components—***sold separately***

**X10 Stainless Steel Break-off**  
(100/110/120—80/90/100 - gr.)

**X10 Ballistic Tungsten Break-off**  
(100/110/120 - gr.)

**AEROJET™**  
X10 Ballistic Tungsten Points are the ultimate hardware for the world's most advanced arrow.  
Aerojet is a trademark of GenCorp Inc.

**X10 Pin™**  
(8 gr.)

**Pin Nock™<sup>3</sup>**  
(2 gr.)

**G Pin™ Nock<sup>5</sup>**  
(4 gr.)

**Over Nock<sup>4</sup>**  
(6 gr.)

Size	Shaft Weight <sup>1</sup>	Shaft Weight @ 29"	Spine @ 28" Span	Stock Length	Maximum Trim Amount <sup>2</sup>	Recommended Point Weight Range
	Grains per Inch	Grains	Deflection in Inches	Inches	Inches	Grains
1000	5.3	154	1.000	28	No limit	90-110
900	5.8	168	0.900	28	No limit	90-110
830	6.2	180	0.830	28 1/2	No limit	90-110
750	6.4	186	0.750	29	3.5	100-110
700	6.7	194	0.700	29	3.5	100-110
650	6.8	197	0.650	29	3.5	100-110
600	7.0	203	0.600	30	4.5	100-110
550	7.5	218	0.550	31	3.5	100-120
500	7.8	226	0.500	32	4.0	100-120
450	8.1	235	0.450	33 1/2	5.5	100-120
410	8.5	247	0.410	33 3/4	5.5	100-120
380	8.9	258	0.380	33 3/4	6.5	100-120

1 Due to the barrel design of the X10, the weight is an average grains-per-inch of a 29" shaft. Shaft weight is slightly heavier in the larger diameter center and lighter toward the tapered ends. One inch of shaft cut from the point end typically weighs 6-7 grains.

2 Recommended that no more than these lengths be cut from the front of the shaft.

3 Pin Nock colors: green, red, blue, orange, and yellow.

4 Over Nock colors: green, orange, and yellow.

5 G Pin Nock colors: green, red, blue, and orange.

BARRELED™

AC™

GI™

MADE IN USA

Small diameter barreled profile resists wind drift better than any other type of arrow.



“저는 지난 2004년 저의 최초 올림픽 게임 출전에서 X10으로 올림픽 기록을 세웠고, 런던 올림픽에서도 다시 기록을 세웠을 뿐만 아니라, 70M 세계 신기록도 세웠습니다. 사실 저는 오늘날 다른 어떤 선수보다 더 많은 세계 기록(단체전 및 개인전)을 세웠으며, 그 기록들은 모두 X10으로 세웠습니다. 그 정밀도가 최고 기량을 쏘는데 제게 자신감을 줍니다.”

**임동현**  
세계 기록 보유자

**IM, Dong-Hyun**  
World Record Holder






# A/C/E®

The arrow that started the barrelled revolution. Lightweight, hyper-accurate and the premium choice for intermediate range competition such as field archery with unmarked distances.

- Lightweight carbon fiber bonded to a precision 7075 alloy core
- 9-micron polished carbon finish
- Guaranteed straightness  $\pm .0015"$
- Weight tolerance:  $\pm 0.5$  grains
- Components—sold separately

## A/C/E® Insert and Point System 5-44 Thread

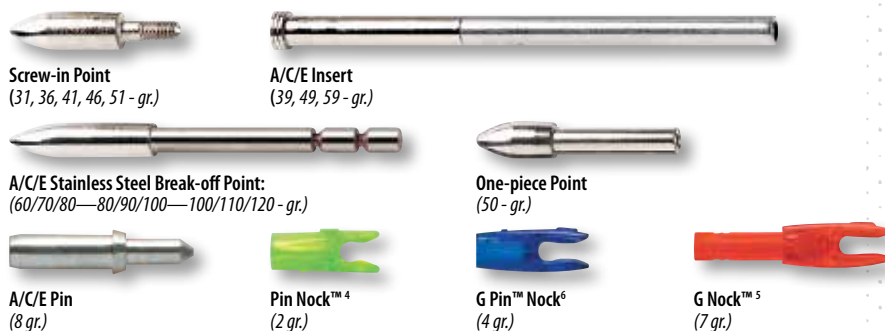

## A/C/E® Insert and Point System 5-44 Thread

A/C/E Insert	Screw-in Point				
Point Weight	#2-31gr.	#3-36gr.	#4-41gr.	#5-46gr.	#6-51gr.
Insert Weight	Total Weight (grains)—Insert and Point				
H - 39gr.	70	75	80	85	90
J - 49gr.	80	85	90	95	100
L - 59gr.	90	95	100	105	110

Size	Shaft Weight <sup>1</sup>	Shaft Weight @ 29"	Spine @ 28" Span	Stock Length	Maximum Trim Amount <sup>3</sup>	Recommended Point Weight Range
	Grains per Inch	Grains	Deflection in Inches	Inches	Inches	Grains
1250 <sup>2</sup>	5.1	148	1.250	26 $\frac{5}{8}$	No limit	60-70
1100 <sup>2</sup>	5.1	148	1.100	28 $\frac{1}{2}$	No limit	70-80
1000	5.7	165	1.000	28 $\frac{3}{4}$	No limit	70-80
920	5.8	168	0.920	28 $\frac{3}{8}$	9.5	70-80
850	5.7	165	0.850	28 $\frac{3}{8}$	No limit	70-80
780	6.0	174	0.780	29 $\frac{1}{8}$	No limit	80-90
720	6.4	186	0.720	29 $\frac{5}{8}$	6.0	80-90
670	5.9	171	0.670	30 $\frac{1}{8}$	No limit	80-90
620	6.1	177	0.620	30 $\frac{3}{8}$	No limit	90-100
570	6.3	183	0.570	31 $\frac{1}{8}$	10.0	90-100
520	6.7	194	0.520	31 $\frac{1}{4}$	4.5	90-100
470	6.8	197	0.470	32 $\frac{1}{2}$	6.5	90-110
430	7.0	203	0.430	32 $\frac{3}{4}$	5.5	100-120
400	7.5	218	0.400	32 $\frac{3}{4}$	4.0	100-120
370	7.9	229	0.370	32 $\frac{7}{8}$	4.0	110-120

1 Due to the barrel design of the A/C/E, the weight is an average grains-per-inch of a 29" shaft. Shaft weight is slightly heavier in the larger diameter center and lighter toward the tapered ends. One inch of shaft cut from the point end typically weighs 5-6 grains.

2 Available as a special order only. Replaced with A/C/C -00 sizes.

3 Recommended that no more than these lengths be cut from the front of the shaft.

4 Pin Nock colors: green, red, blue, orange, and yellow.

5 G Nock colors: black, white, green, orange, and red.

6 G Pin Nock colors: green, red, blue, and orange.



"Die außerordentliche Geschwindigkeit und die phänomenale Präzision der ACE-Schäfte verzeihen bezüglich der Entfernung- und Winkelschätzung gerade so viel, wie für mich notwendig war, um die Weltmeisterschaft im Feldbogensport auf einem sehr schwierigen Parcours zu gewinnen. Sie sind einfach einzustellen und sehr beständig. Aber das wohl Wichtigste: Ihre Qualität und die Beschaffenheit sind einfach perfekt für meine Anforderungen. Es ist einfach der beste Recurvebogen!"

**Elena Richter**

Weltmeisterschaft Im Feldbogensport  
World Field Champion





# X10<sup>®</sup> PROTOUR<sup>™</sup>

World records speak for themselves. So do world championships.  
Compound competitors worldwide win with X10 record-setting Pro Tour.

- High-strength carbon fiber bonded to a 7075 alloy core
- 9-micron polished carbon finish
- Guaranteed straightness  $\pm .0015''$
- Weight tolerance:  $\pm 0.5$  grains
- Components—sold separately



X10 Stainless Steel Break-off  
(100/110/120—80/90/100 - gr.)



X10 Ballistic Tungsten Break-off  
(100/110/120 - gr.)



ProTour Pin<sup>™</sup> (380 - 620)  
(8 gr.)



G Pin<sup>™</sup> Nock<sup>4</sup>  
(4 gr.)



X10 Pin<sup>™</sup> (670 - 770)  
(8 gr.)



Pin Nock<sup>™ 3</sup>  
(2 gr.)

Size	Shaft Weight <sup>1</sup> Grains per Inch	Shaft Weight @ 29" Grains	Spine @ 28" Span Deflection in Inches	Stock Length Inches	Maximum Trim Amount <sup>2</sup> Inches	Recommended Point Weight Range Grains
770	6.0	174	0.770	29	No limit	90-110
720	6.2	181	0.720	29½	No limit	90-110
670	6.5	188	0.670	29¾	4.0	100-110
620	6.7	194	0.620	30	4.5	100-110
570	6.9	201	0.570	31	5.0	100-120
520	7.3	210	0.520	32	5.5	100-120
470	7.6	220	0.470	33¼	6.0	100-120
420	8.0	233	0.420	33¾	6.5	100-120
380	8.4	244	0.380	34	7.0	100-120

1 Due to the taper design of the X10 Pro Tour, the grain weight-per-inch shown is an average weight-per-inch of a 29" shaft. Shaft weight is slightly heavier toward the larger-diameter nock end and lighter toward the tapered front end. One inch of shaft cut from the point end typically weighs 6-7 grains.

2 Recommended that no more than these lengths be cut from the front of the shaft.

3 Pin Nock colors: green, red, blue, orange, and yellow.

4 G Pin Nock colors: green, red, blue, and orange.



«На протяжении всей своей карьеры я выбирала лучшие стрелы Easton. Они отличаются прочностью и идеальной точностью попадания. Именно благодаря им я выиграла Кубок мира и доверяю им при стрельбе каждый день. Стрелы ProTour — просто потрясающие».

**Альбина Логинова**

2-кратная чемпионка мира

**Albina Loginova**

2-Time World Champion



"Mijn wereldrecord van 1419 bewijst dat Pro Tour absoluut de beste, meest accurate pijl is voor precisie op lange afstand met de compoundboog. Er bestaat geen twijfel dat Pro Tour zijn gelijke niet kent voor compoundschutters. Er zijn geen excuses op 90 meter."

**Peter Elzinga**

Wereldrecordhouder,  
Fita-ronde  
World Record Holder,  
Fita Round






# A/C PRO FIELD™

The world's premiere target shaft, Pro Field is specifically designed for high performance at outdoor compound distances.

- Lightweight carbon fiber bonded to a precision 7075 alloy core
- Weight tolerance:  $\pm 0.5$  grains
- 9-micron polished carbon finish
- Components—sold separately
- Guaranteed straightness  $\pm .0015"$

## A/C/E® Insert and Point System 5-44 Thread

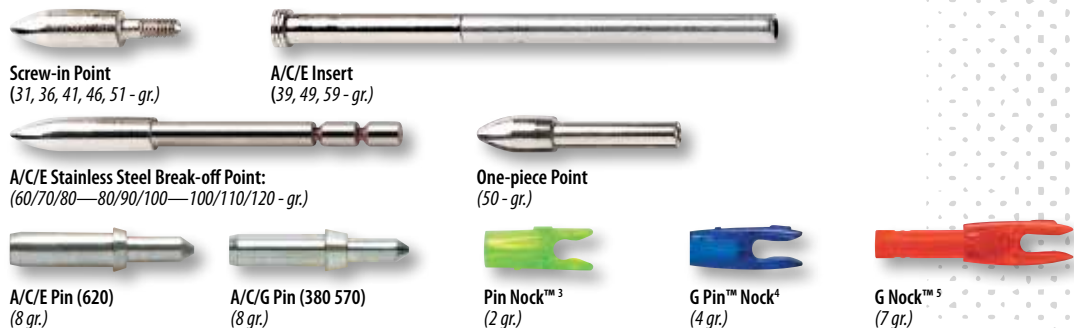

## A/C/E® Insert & Point System 5-44 Thread A/C/E® Points Pin Nock System A/C/E® Nock

A/C/E Insert	Screw-in Point					One Piece	Stainless Steel Break-off	Pin Nock Adapters <sup>6</sup>	Pin Nock <sup>3</sup>	G pin™ Nock <sup>4</sup>	"G" Nock <sup>5</sup>
Point Weight	#2-31gr.	#3-36gr.	#4-41gr.	#5-46gr.	#6-51gr.	Grains	Grains	Grains	Grains	Grains	Grains
Insert Weight	Total Weight (grains)—Insert and Point					Grains	Grains	Grains	Grains	Grains	Grains
H - 39gr.	70	75	80	85	90	50	60/70/80	8	2	4	7
J - 49gr.	80	85	90	95	100	50	80/90/100	8	2	4	7
L - 59gr.	90	95	100	105	110	50	100/110/120	8	2	4	7

Size	Shaft Weight <sup>1</sup>	Shaft Weight @ 29"	Spine @ 28" Span	Stock Length	Maximum Trim Amount <sup>2</sup>	Pin Nock Adapter	Recommended Point Weight Range
	Grains per Inch	Grains	Deflection in Inches	Inches	Inches	Description (8 Grains)	Grains
620	6.1	177	0.620	30	No limit	AC PF 570-620	90-100
570	6.4	185	0.570	31	5.0	AC PF 570-620	100-120
520	6.7	194	0.520	32	5.5	AC PF 470-520	100-120
470	7.0	204	0.470	33½	6.0	AC PF 470-520	100-120
420	7.5	217	0.420	33¾	6.5	AC PF 380-420	100-120
380	7.8	227	0.380	34	7.0	AC PF 380-420	100-120

<sup>1</sup> Due to the taper design of the A/C Pro Field, the grain weight-per-inch shown is an average weight-per-inch of a 29" shaft. Shaft weight is slightly heavier toward the larger diameter nock end and lighter toward the tapered front end. One inch of shaft cut from the point end typically weighs 6 grains.

<sup>2</sup> Recommended that no more than these lengths be cut from the front of the shaft.

<sup>3</sup> Pin Nock Colors: green, red, blue, orange, and yellow.

<sup>4</sup> G Pin Nock colors: green, red, blue, and orange.

<sup>5</sup> "G" Nock Colors: black, white, green, orange, red, blue, and deep red.

<sup>6</sup> Refer to Shaft Chart for correctly sized Pin Nock Adapter to use.

TAPERED™ A/C™ FIT™ MADE IN USA™  
"Maastojousiamunnassa Pro Field

antaa enemmän viivakosketuksia ja lisää pistepotentiaalia. Nuolia on helppo virittää, ja ne ovat todella tarkkoja. Niitä voi ampuu hyvin vakaasti, mikä on erittäin tärkeää kilpailussa, joissa matkaa ei ole merkitty. Kun jokainen piste on ratkaiseva voittamisen tai häviämisen kannalta, ProField voi antaa juuri voittamiseen tarvittavan ylilyöntiaseman."



**Jari Haavisto**  
Maastoammunnan MM-mitalisti  
World Field Medalist



**Kristina Berger**  
European Champion



# A/C/G™

ACG sets the highest standard in parallel shaft target performance. With a spine size to fit every setup, A/C/G is precisely spine and weight matched for the highest level of archery.

- High-strength carbon fiber bonded to a precision 7075 aerospace alloy core tube
- Polished carbon finish
- Guaranteed straightness:  $\pm .002''$
- Weight tolerance:  $\pm 1.0$  grain
- Components—*sold separately*



A/C/E One-piece (610 - 1500)  
(50 gr.)



A/C/E Stainless Steel Break-off (610-1500)  
(60/70/80—80/90/100—100/110/120 gr.)



A/C/G Stainless Steel Break-off (430-480-540)  
(100/110/120 gr.)



A/C/G Pin (430-540)  
(8 gr.)



Pin Nock<sup>2</sup>  
(2 gr.)



G Pin™ Nock<sup>4</sup>  
(4 gr.)



G Nock<sup>3</sup>  
(7 gr.)



A/C/E Pin (610 - 1500)  
(8 gr.)

## A/C/G™ Insert and Point System 5-44 Thread



Screw-in Point  
(31, 36, 41, 46, 51 - gr.)



A/C/E Insert  
(39, 49, 59 - gr.)

## A/C/G™ Insert and Point System 5-44 Thread

A/C/E Insert	Screw-in Point				
Point Weight	#2-31gr.	#3-36gr.	#4-41gr.	#5-46gr.	#6-51gr.
Insert Weight	Total Weight (grains)—Insert and Point				
H - 39gr.	70	75	80	85	90
J - 49gr.	80	85	90	95	100
L - 59gr.	90	95	100	105	110

Size	Shaft Weight	Shaft Weight @ 29"	Spine @ 28" Span	Stock Length	Recommended Point Weight Range
	Grains per Inch	Grains	Deflection in Inches	Inches	Grains
1500	4.7	136	1.500	28	50-70
1300	5.1	148	1.300	28½	50-70
1150	5.5	160	1.150	28½	50-70
1000	5.5	160	1.000	29	70-80
880	5.9	171	0.880	29½	70-80
810	6.1	177	0.810	30	80-90
710	6.5	189	0.710	30½	80-90
660	6.9	200	0.660	30¾	80-90
610	7.3	212	0.610	31	80-90
540 <sup>1</sup>	7.7	223	0.540	31½	100
480 <sup>1</sup>	8.4	244	0.480	32	100-110
430 <sup>1</sup>	8.9	258	0.430	32½	100-110

1 430, 480, 540 sizes use unique A/C/G point and nock pin. All others use A/C/E points and nock pins.

2 Pin Nock colors: green, red, blue, orange, and yellow.

3 G Nock colors: black, white, green, orange, blue, deep red and red.

4 G Pin Nock colors: green, red, blue, and orange.

PARALLEL™

A/C™

P™

MADE IN USA



"Until an archer's form and growth are stabilized, I like to have them stay with a simple and easy to tune arrow. The A/C/G is a good example—extremely accurate and with tunability for a great match for many types of archer. It's professional quality, but you don't need to be a professional to get the value they provide."

**Kisik Lee**  
USA Team Coach





# A/C/C®

The enduring favorite of compound and recurve shooters worldwide, ACC shafts are renowned for surgical precision and amazing durability.

- High-strength carbon fiber bonded to a precision 7075 alloy core tube
- Polished carbon finish
- Guaranteed straightness:  $\pm .002''$
- Weight tolerance:  $\pm 0.5$  grains
- Components—sold separately



A/C/C NIBB Point



A/C/C One-piece Parabolic Point



RPS Point



8-32 Half-out Insert



RPS Insert



UNI Bushing®



G Nock™

Size	Shaft Weight	Shaft Weight @ 29"	Spine @ 28" Span	Stock Length	Point/Insert Sizes	UNI® System		One-Piece Parabolic Point				NIBB Point		RPS Inserts <sup>4</sup>		RPS Point <sup>5</sup>
						Bushing	G Nock <sup>2</sup>	Heavy Wt.	Med. Wt.	Light Wt.	Extra Light Wt.	Hyper Light Wt.	Two-piece	Halfout	Alum.	
	Grains per Inch	Grains	Deflection in Inches	Inches		Grains	Grains	Grains <sup>3</sup>	Grains <sup>3</sup>	Grains <sup>3</sup>	Grains <sup>3</sup>	Grains <sup>3</sup>	Grains <sup>3</sup>	Grains <sup>3</sup>	Grains <sup>3</sup>	O.D. Inches
2-00	4.7	136	1.500	28	-00*	—	7	—*	50*	—*	—*	—*	—	—	—	—
3L-00	5.1	148	1.300	28½	-00*	—	7	—*	50*	—*	—*	—*	—	—	—	—
3-00	5.5	160	1.150	28½	-00*	—	7	—*	—*	—*	50*	—*	—	—	—	—
2L-04	6.1	177	1.020	29	-04	2	7	100	80	70	60	50	—	—	—	—
2-04	6.5	189	0.920	29½	-04	2	7	100	80	70	60	50	—	—	—	—
3X-04	6.7	194	0.830	29½	-04	2	7	100	80	70	60	50	—	—	—	—
3L-04	7.0	203	0.750	30	-04	2	7	100	80	70	60	50	—	—	—	—
3-04	7.2	209	0.680	30	-04	2	7	100	80	70	60	50	—	—	—	—
3L-18	7.5	218	0.620	31	-18	3	7	—	100	82	70	60	70	16	—	17/64
3-18	7.8	226	0.560	31	-18	3	7	—	100	82	70	60	70	16	—	17/64
3-28	8.1	235	0.500	31½	-28	4	7	—	100	87	70	60	70	18	—	17/64
3-39	8.6	249	0.440	31½	-39	5	7	—	100	85	70	60	70	22	—	9/32
3-49	8.8	255	0.390	32	-49	6	7	—	—	100	80	70	80	—	9	9/32
3-60	9.5	276	0.340	32½	-60	7	7	—	—	108	90	80	90	—	11	5/16
3-71	9.9	287	0.300	33	-71	8	7	—	—	114	90	80	90	—	14	5/16

1 UNI—Universal Nock Installation System.

2 G Nock available in black, white, green, blue, deep red, orange, red, and comes in .088" and .098" string groove sizes.

3 NIBB Point grain weights are  $\pm 0.5$  grains; all other components are  $\pm 1$  grain.

4 RPS=Replaceable Point System.

5 RPS target points available in 50-125 grains.

— Indicates not available.

\* A/C/C-00 sizes use the same size core tube as A/C/E shafts and may use all A/C/E points, inserts, and nocks.

PARALLEL™

AC™

UNI®  
BUSHING

GT™

MADE IN  
USA



"At the level I compete at, nothing is more important than reliability, consistency and performance. That's why I shoot Easton. Every arrow in a dozen is perfect. So I can just fletch them up and they always go where I expect. This way I can focus on my game and I don't have to worry about sorting arrows or fooling around with my tune. That's priceless."

**Reo Wilde**

14-Time World Champion





# CARBON ONE™

Sets the mark in the all-carbon parallel target shaft category. For the highest level of outdoor competition, look no further than Carbon One.

- High-strength nanotube-infused carbon fibers
- Micro-smooth finish
- Straightness:  $\pm .003"$
- Weight tolerance:  $\pm 1$  grain
- Components—*sold separately*
- Also uses A/C/E components



Carbon One Stainless Steel Break-off  
(70/80/90—90/100/110 gr.—100/110/120 gr.)



Carbon One -1 Pin  
(550-730)  
(9 gr.)



Carbon One -2 Pin  
(500-410)  
(9 gr.)



Pin Nock™<sup>1</sup>  
(2 gr.)



A/C/E Pin™  
(810-1150)  
(9 gr.)



G Pin™ Nock<sup>2</sup>  
(4 gr.)



G Nock™<sup>3</sup>  
(7 gr.)

Size	Shaft Weight	Shaft Weight @ 29"	Spine @ 28" Span	Stock Length	Point	Recommended Point Weight	Nock Pin Adapter	Nock
	Grains per Inch	Grains	Deflection in Inches	Inches				
1150	5.0	146	1.150	28 1/8	Carbon One 90/80/70	70-80	A/C/E	Pin Nock <sup>1</sup>
1000	5.0	145	1.000	28 3/8		80-90		G Pin Nock <sup>2</sup>
900	5.3	155	.900	28 3/4		80-90		G Nock <sup>3</sup>
810	5.8	168	.810	29 1/8		80-90		
730	6.0	174	.730	29 3/4	Carbon One 110/100/90	90-100	Carbon One-1	Pin Nock
660	6.6	193	.660	30 3/8		90-100		G Pin Nock
600	6.9	201	.600	30 3/4		100-110		G Nock
550	6.9	201	.550	31 3/32		100-110		
500	7.4	213	.500	31 1/2	Carbon One 120/110/100	110-120	Carbon One-2	Pin Nock
450	8.1	235	.450	31 7/8		110-120		G Pin Nock
410	8.5	247	.410	32 3/32		110-120		G Nock

1 Pin Nock colors: green, red, blue, orange, and yellow.

2 G Pin Nock colors: green, red, blue, and orange.

3 G Nock colors: black, white, green, orange, blue, deep red, red, in .088" or .098" string groove sizes.

Bayer and design are registered trademarks of Bayer Aktiengesellschaft  
Hybtonite is registered trademark of Amroy

Bayer® Nanotubes



N-FUSE CARBON.



MADE IN USA

PARALLEL™

## CARBON ONE™



"With a full range of spines and small O.D. performance, I love the Carbon One for my shooters. Carbon One is easy to tune, easy to pull from targets and super accurate. The precision gives my shooters the confidence they need to advance."

**Cindy Bevilacqua**

Coach and USA Team Leader



# LIGHTSPEED™ & LIGHTSPEED 3D™

Super light weight carbon layup makes LightSpeed a superior 3D and indoor target shaft in the highspeed category. Precise carbon construction and a performance oriented weight range make Lightspeed forgiving and tough.

- Multi-layer wrapped carbon fibers
- Smooth matte black finish
- 3D straightness:  $\pm .001"$
- LightSpeed straightness:  $\pm .003"$
- Weight tolerance:  $\pm 2$  grains
- G-UNI Bushing—*installed*
- Point—*sold separately*
- G Nock—*sold separately*



CB Point



RPS Point



CB Insert



G-UNI Bushing®



G Nock™

Size	Shaft Weight Grains per Inch	Shaft Weight @ 29" Grains	Spine @ 28" Span Deflection in Inches	Stock Length Inches	UNI Bushing¹ Grains	G Nock Grains	CB Insert Grains	CB Point² Grains	RPS Point O.D. Inches
500	6.5	189	0.500	31 ½	12	7	21	80/100	932
400	7.4	215	0.400	32	12	7	21	80/100	932
340	8.2	238	0.340	32 ½	12	7	21	80/100	516

1 G-UNI Bushing factory installed.

2 RPS screw-in points, available in 50-125 grains.

Note: one-size CB Insert and CB Point fits all LightSpeed shaft sizes.

**SUPERLITE-CARBON™**



"Easton LightSpeed gives me exactly what I need to stay competitive. When accuracy, speed, and durability are needed for the win, I rely on Easton LightSpeed."

**Alicia McHenry**

3D Tournament Archer





# FULL BORE™

Maximum 27-class diameter for line-catching forgiveness combines with tough multilayer carbon construction. 14 rings, beware.

- Straightness:  $\pm .003''$
- Weight tolerance:  $\pm 2$  grains
- 27/64" outside diameter
- Specifically engineered for indoor and 3D
- Black, smooth matte finish
- Multi-layer wrapped carbon fibers
- Super UNI bushings—*installed*
- G-UNI bushings—*optional*
- Inserts, points, and nocks—*sold separately*



Full Bore One-piece Point  
(100/150/200 gr.)



G-UNI Bushing®



G Nock™



Super UNI Bushing®



MicroLite™ Super Nock®



Super Nock®

Size	Shaft Weight	Shaft Weight @ 29"	Spine @ 28" Span	Minimum Stock Length	Super Nock <sup>1</sup>	Micro <sup>2</sup> Super Nock	Super UNI Bushing	G Nock <sup>3</sup>	G UNI Bushing	One-piece Point
	Grains per Inch	Grains	Deflection in Inches	Inches	Grains	Grains	Grains	Grains	Grains	Grains
350	8.4	244	0.350	32	13	8	19	7	21	100/150/200

1 Super Nock available colors: green, orange, yellow, white, and black. 3D Super Nock available colors: green, orange, white, and black  
2 MicroLite Super Nock available colors: blaze, emerald, yellow, smoke, and red

3 G Nock available in black, white, blue, deep red, green, orange, and red, and comes in .088" and .098" string groove sizes.

microLite™

SUPERLITE-CARBON™

UNI<sup>®</sup>  
BUSHING



**Darrin Christenberry**  
Tournament Representative



**Eric Griggs**  
3D Tournament Archer



**Jeff Hopkins**  
3D Tournament Archer

# FATBOY™

World Archery maximum 23-class, 9.3mm shaft for indoor target and outdoor compound performance.

- Specifically engineered for indoor and 3D
- 23/64" outside diameter
- Multi-layer wrapped carbon fibers
- Black, smooth matte finish
- Straightness:  $\pm .003"$
- Weight tolerance:  $\pm 2$  grains
- Super or G-UNI bushing—*installed*
- Inserts, points, and nocks—*sold separately*



One-piece Bullet Point



RPS Point



FatBoy Insert



G-UNI Bushing®



G Nock™



Super UNI Bushing®



Super Nock® or 3D Super Nock®



MicroLite™ Super Nock®

Size	Shaft Weight Grains per Inch	Shaft Weight @ 29" Grains	Spine @ 28" Span Deflection in Inches	Minimum Stock Length Inches	Super Nock Grains	Micro Super Nock Grains	Super <sup>1</sup> UNI Bushing Grains	G Nock <sup>3</sup> Grains	G <sup>1</sup> UNI Bushing Grains	FatBoy RPS Insert Grains	One-piece Point Grains	RPS Point <sup>2</sup> O.D. Inches
500	7.1	206	0.500	31½	13	8	9	7	13	40	80/100	11/32
400	7.8	226	0.400	32	13	8	9	7	13	40	80/100	11/32
340	8.3	241	0.340	33¼	13	8	9	7	13	40	80/100	11/32

<sup>1</sup> Super or G-UNI Bushing factory installed.

<sup>2</sup> RPS screw-in points available in 50-125 grains.

<sup>3</sup> G Nock available in black, white, blue, deep red, green, orange, and red, and comes in .088" and .098" string groove sizes.

**microLite™**

**SUPERLITE-CARBON™**

**UNI<sup>®</sup>**  
BUSHING

\*FatBoy meets the maximum diameter restriction for World Archery Tournaments.

# fatBoy

"Quando si tratta di precisione, il tiro con l'arco indoor può essere davvero spietato. A Nimes anche i bersagli erano inclementi: fermavano le frecce in soli tre, quattro centimetri. Ecco perché ho scelto le ottime prestazioni delle frecce Fatboy. Resistenti quanto basta per i duri bersagli europei e più precise di quanto possa esserlo qualunque essere umano. Le mie medaglie ne sono la prova".



**Sergio Pagni**

Vincitore della Coppa del Mondo  
Two-Time World Cup Champion





# X7 ECLIPSE™

Eclipse is built with the highest level of factory precision. Impeccable spine, weight and straightness tolerances give indoor shooters the most accurate tool to achieve the highest scores possible. It's the ultimate choice when precision counts.

- 7178-T9 aerospace alloy
- Hard-anodized finish
- Available in black

- Guaranteed straightness:  $\pm .001"$
- Weight tolerance:  $\pm .75\%$
- Strength (psi): 105,000



NIBB Point



RPS Point



One-piece Bullet Point



RPS Insert



G-UNI Bushing®  
(for sizes 1914 and smaller)



G Nock™  
(for sizes 1914 and smaller)



Super UNI Bushing®



Super Nock® or 3D Super Nock®



MicroLite™ Super Nock®

Sizes: 1514, 1614, 1714, 1814, 1914, 2014, 2114, 2212, 2213, 2214, 2311, 2312, 2314, 2315, 2412, 2413, 2511, 2512, 2612, 2613, 2712

• G-UNI or Super UNI Bushing—*installed*

• Nocks and points—*sold separately*

• Colors: jet black or cobalt blue



# ECLIPSE™



Reo Wilde

14-Time World Champion

# XX75<sup>®</sup> **PLATINUM<sup>®</sup>** PLUS

Sophisticated alloys and processes are part of the story- precise performance is the rest. Platinum Plus is a premium, intermediate price shaft for all levels of recreational and competitive archery.

- 7075-T9 aerospace alloy
- Hard-anodized finish
- Guaranteed straightness:  $\pm .002"$
- Weight tolerance:  $\pm 1\%$
- Strength (psi): 96,000



NIBB Point



RPS Point



One-piece Bullet Point



RPS Insert



G-UNI Bushing<sup>®</sup>  
(For Platinum Plus sizes  
1914 and smaller)



G Nock<sup>™</sup>  
(For Platinum Plus sizes  
1914 and smaller)



Super UNI Bushing<sup>®</sup>



Super Nock<sup>®</sup> or 3D Super Nock<sup>®</sup>



MicroLite<sup>™</sup> Super Nock<sup>®</sup>

Sizes: 1416, 1516, 1616, 1713, 1716, 1813, 1816, 1913, 1916, 2013, 2016, 2114, 2213, 2315

• G-UNI or Super UNI Bushing—installed    • Nocks and points—sold separately



**Darrin Christenberry**  
Tournament Relations

XX75<sup>®</sup> PLATINUM<sup>®</sup> PLUS





# TRIBUTE™

Tribute is a target shaft constructed with Easton's proprietary XX75 alloy. Durable, accurate and economical, Tribute is the stepping stone to high performance for any beginning or shorter draw lighter poundage archer.

- 7075 aerospace alloy
- Hard-anodized black finish
- Guaranteed straightness:  $\pm .005"$
- Weight tolerance:  $\pm 2\%$
- Strength (psi): 90,000
- Precision-ground nock swage



NIBB Point



One-piece Bullet Point



One-piece Point



RPS Point



RPS Insert



Conventional Nock

Sizes : 1214, 1413, 1416, 1516, 1616, 1716, 1816, 1916, 2016

• Components—sold separately • Precision-ground nock swage



You've seen it in Hollywood blockbusters and on TV screens across the world—archery is hot and getting hotter. Constructed of high strength alloys, Tribute is the stepping stone to high performance for any beginning or shorter draw lighter poundage archer. Precision nock swage for accuracy and simplicity. Get into archery right way with the right arrow—Tribute.

# XX75<sup>®</sup> JAZZ<sup>®</sup>

Jazz features all the accuracy benefits of XX75 alloy and comes in sizes all the way down to 1214 to outfit any beginning archer.

- 7075 aerospace alloy
- Hard-anodized finish
- Guaranteed straightness:  $\pm .005"$
- Weight tolerance:  $\pm 2\%$
- Strength (psi): 90,000
- Precision-ground nock swage



NIBB Point



One-piece Bullet Point



RPS Point



RPS Insert



Conventional Nock

Sizes: 1214, 1413, 1416, 1516, 1616, 1716, 1816, 1916, 2016

Wide range of spines for a perfect size to match any novice archer.

• Components—sold separately

• 1214 size uses the direct-fit G Nock





# XX75<sup>®</sup> GENESIS<sup>™</sup>

The only arrow approved by NASP for tournament use.  
Economical, accurate and durable.

- 7075 aerospace alloy
- Hard-anodized blue
- Guaranteed straightness:  $\pm .005"$
- Weight tolerance:  $\pm 2.5\%$
- Strength (psi): 90,000
- UNI bushing—*installed*



One-piece Point



G-UNI Bushing<sup>®</sup>



N Nock<sup>™</sup>

Size: 1820

• Colors—cobalt blue & orange



\*Genesis is a trademark owned by MCP Productions LLC.



# NEOS™

Legendary 7075 alloy quality, Neos comes in the durable 1618 size, the ideal spine for leisure and beginner archers shooting lighter-weight bows.

- 7075 aerospace alloy
- Hard-anodized gold
- Guaranteed straightness:  $\pm .008"$
- Weight tolerance:  $\pm 5\%$



One-piece Point



Conventional Nock

Size : 1618

• Components—sold separately



neos



neos





# FLASH<sup>TM</sup>

- Small-diameter, unidirectional pultruded carbon
- Available in seven sizes
- Over Nock—sold separately

Size	Shaft Weight	Shaft Weight @ 29"	Spine @ 28" Span	Minimum Stock Length	Over Nock <sup>1</sup>	Glue-In Point	Component Size
	Grains per Inch	Grains	Deflection in Inches	Inches	Grains	Grains	
1400	5.3	154	1.400	27	6	45	4.5
1200	6.3	183	1.200	27 <sup>1</sup> / <sub>4</sub>	6	45	4.5
1000	5.6	162	1.000	27 <sup>1</sup> / <sub>2</sub>	8	54	5.0
900	6.4	186	.900	28 <sup>1</sup> / <sub>2</sub>	8	54	5.0
750	6.2	180	.750	29 <sup>1</sup> / <sub>2</sub>	10	70	5.5
630	7.0	203	.630	30 <sup>1</sup> / <sub>2</sub>	10	70	5.5
570	7.2	209	.570	31 <sup>1</sup> / <sub>2</sub>	10	70	5.5

MADE IN  
USA

## BEMAN FLASH SHAFT SIZE SELECTION

COMPOUND BOW											RECURVE BOW
Medium Cam	Single or Dual Hard Cam										Bow Weight - lbs. Finger Release
		23"	24"	25"	26"	27"	28"	29"	30"	31"	
27-31 lbs.	22-26 lbs.	1400 1200 1000	1400 1200 1000	900	750	750	750	630	630	570	22-26 lbs.
32-36 lbs.	27-31 lbs.	1400 1200 1000	900	750	750	750	630	630	570		27-31 lbs.
37-41 lbs.	32-36 lbs.	900	750	750	750	630	630	570			37-41 lbs.
42-46 lbs.	37-41 lbs.	750	750	750	630	630	570				42-46 lbs.
47-51 lbs.	42-46 lbs.	750	750	630	630	570					22-51 lbs.
52-56 lbs.	47-51 lbs.	750	630	630	570						47-26 lbs.
57-61 lbs.	52-56 lbs.	630	630	570							52-56 lbs..
62-66 lbs.	57-61 lbs.	630	570								57-61 lbs.

# DIVA™

The Legend Returns. Beman is renowned for all-carbon performance, and the reborn DIVA is more powerful than ever before. Ideally suited for compound performance, this World Archery maximum diameter regulation shaft is constructed with multilayer carbon construction. Superior specifications provide peak performance whether your target is at the world championship or the Thursday night league.

- Specifically engineered for indoor and 3D
- 23/64" outside diameter
- Maximum World Archery O.D.
- Multi-layer wrapped carbon fibers
- Black, smooth matte finish
- Straightness:  $\pm .003"$
- Weight tolerance:  $\pm 2$  grains
- Super UNI Bushing—*installed*
- Inserts, points, and nocks—*sold separately*



One-piece Bullet Point



RPS Point



FatBoy Insert



Super UNI Bushing®



Super Nock® or 3D Super Nock®

Size	Shaft Weight	Shaft Weight @ 29"	Spine @ 28" Span	Minimum Stock Length	Super Nock	Micro Super Nock	Super <sup>1</sup> UNI Bushing	FatBoy RPS Insert	One-piece Point	RPS Point <sup>2</sup>
	Grains per Inch	Grains	Deflection in Inches	Inches	Grains	Grains	Grains	Grains	Grains	O.D. Inches
500	7.1	206	0.500	31½	13	8	9	40	80/100	11/32

<sup>1</sup> Super UNI Bushing factory installed.

<sup>2</sup> RPS screw-in points available in 50-125 grains.

**microLite™**

**SUPERLITE-CARBON™**

**UNI<sup>®</sup>**  
BUSHING

**MADE IN USA**

\*Diva meets the maximum diameter restriction for World Archery Tournaments.



**Alicia Dowdy**  
Tournament Shooter

**Cynthia Williams**  
Tournament Shooter



**BEMAN** TARGET by Easton®





# POINTS, INSERTS & NOCKS

When it comes to the art and science of precision components for the world's best arrows, no one knows more than the experts at Easton. From the original, ultra precision MIDnox of the 1960's to the world's most precise, single-cavity PIN nock system and the most advanced tungsten points ever made, Easton has continually defined start of the art and pushed the boundaries of material science. Sophisticated heat treatment, precision machining and the finest materials are hallmarks of Easton quality components.

## POINTS



### Bullet Point - Nickel-plated Hardened Steel

Fits aluminum shafts, FatBoy - 80 and 100 grains  
Packaging - dozen pack



### CB™ Point - Nickel-plated Hardened Steel

Fits LightSpeed & FlatLine models • Point weight - 80 and 100 grains  
Packaging - dozen pack



### NIBB Point - Nickel-plated Hardened Steel & Precision Alloy Tube

Fits aluminum shafts, ACC & Carbon One arrows  
Packaging - dozen pack



### A/C/C® One-piece Parabolic Point - Nickel-plated Hardened Steel

Fits ACC & Carbon One arrows • Point Weight - 80 and 100 grains  
Packaging - dozen pack



### A/C/E® One-piece Point - Nickel-plated Hardened Steel

Fits A/C/E, A/C/C, A/C/G & Carbon One (810-1150) models • Point weight - 50 grains  
Packaging - dozen pack



### HP™ Point

Fits ACC Hunting, BloodLine, WildThing, AfterMath & ION • Point Weight - 80 and 100 grains  
Packaging - dozen pack



### Full Bore™ One-Piece Point

Fits Full Bore • Point Weight - 100-150 - 200 grains  
Packaging - dozen pack

## INSERTS



### A/C/E® & A/C/G™ 5-44 Screw-in Insert - Nickel Plated

Hardened Steel and Precision Alloy Tube  
Fits all A/C/E, A/C/G (610 to 1500)  
Insert Weight - 39, 49, 59 grains  
Packaging - dozen pack



### Halfout RPS Insert - Precision Alloy Hard Anodized

Fits ACC arrows  
Packaging - dozen pack



### RPS Insert

Fits alloy arrows  
Packaging - dozen pack and 100-count bulk

## BREAK-OFF POINTS



### AEROJET™ X10® Ballistic Tungsten Break-off

Fits X10 and X10 ProTour  
Point weight - 100 to 120 grains  
Packaging - dozen pack



### X10® Stainless Steel Break-off

Fits X10 and X10 ProTour • Point weight - 80 to 100 and 100 to 120 grains  
Packaging - dozen pack



### A/C/E® Stainless Steel Break-off

Fits A/C/E, A/C/G (610 - 1500)  
Point weight - 60 to 80, 80 to 100, and 100 to 120 grains  
Packaging - dozen pack



### A/C/G™ Stainless Steel Break-off

Fits A/C/G (540 - 430) • Point weight - 100 to 120 grains  
Packaging - dozen pack



### Carbon One™ Stainless Steel Break-off

Fits Carbon One (600 - 1150)  
Point weight - 70 to 90, 90 to 110, 100 to 120 grains  
Packaging - dozen pack

## PINS



### X10® Pin 7075 Aerospace-Alloy

Fits X10 and X10 ProTour arrows (670-770)  
Packaging - dozen pack



### ProTour™ Pin 7075 Aerospace-Alloy- (only ProField620)

Fits X10 ProTour Arrows (380 - 620)  
Packaging - dozen pack



### A/C/E® Pin 7075 Aerospace-Alloy

Fits All A/C/E, A/C/G, Pro Field (610 - 1500)  
& Carbon One (810-1150)  
Packaging - dozen pack



### A/C/G™ Pin 7075 Aerospace-Alloy

Fits A/C/G (540 - 430)  
ProField (380 - 570)  
Packaging - dozen pack



### Carbon One™ Pin 7075 Aerospace-Alloy

Fits Carbon One (730-600)  
Packaging - dozen pack

## INDEXABLE PIN NOCKS



### Pin Nock™ Precision-molded Press-fit Indexable

Fits all nock pins, see arrow models for fitment  
Colors: green, red, blue, orange, yellow  
Packaging - dozen pack



### G Pin™ Nock, Precision-molded, Press-fit Indexable

Fits all nock pins, see arrow models for fitment  
Colors: green, orange, red, blue  
Packaging - dozen pack

## SCREW-IN POINTS



### RPS Screw-in Point - Nickel-plated Hardened Steel

17/64" - 50, 60, 70, 80, 90, 100, 110, 125 grains  
9/32" - 50, 60, 70, 80, 90, 100, 110, 125 grains  
Packaging - dozen clamshell



### A/C/E® 5-44 Screw-in Point - Nickel-plated Hardened Steel

Fits A/C/E, A/C/G (610 - 1500)  
Point Weight - 31, 36, 41, 46, 51 grains  
Packaging - dozen pack



### Combo Point

17/64" - 75, 85, 100 grains  
9/32" - 75, 85, 100 grains  
5/16" - 85, 100, 125 grains  
11/32" - 85, 100, 125 grains  
Packaging - dozen clamshell pack  
1000-count box

## UNI BUSHINGS



### X-UNI™

Fits XX75 Camo Hunter sizes 1816, 1916  
A/C/C Pro Hunting Series  
Packaging - dozen pack



### G-UNI Bushings®, Precision Alloy

Fits aluminum arrows  
Fits ACC, LightSpeed, FlatLine, Fatboy & Full Bore arrows  
(see charts on select model pages)  
Packaging - dozen pack

## INDEXABLE NOCKS



### **N Nock™**

*Fits Genesis*

*Packaging - dozen pack*



### **G Nock™, Precision-molded, Press-fit**

*Fits UNI Bushing. See arrow models for compatibility*

*Colors: black, white, green, orange, red, blue, deep red*

*Packaging - dozen pack and 100-count bulk*



### **X Nock™, Precision-molded, Press-fit**

*Fits all AXIS models, & XX75 Camo Hunter (1816 & 1916)*

*Colors: black, white, yellow, green, orange, blue, smoke, bone*

*Packaging - dozen pack*



### **Super Nock® & S Nock**

#### **Precision-molded, Press-fit**

*Fits most standard-diameter carbon arrows and aluminum shafts with Super UNI Bushings*

*Colors: orange, green, yellow, Black & White*

*Packaging - dozen pack and 100-count bulk*



### **3D Super Nock®, Precision Molded, Press-fit**

*Fits most standard-diameter carbon arrows and aluminum shafts with Super UNI Bushings*

*Colors: black, green, orange, white*

*Packaging - dozen pack and 100-count bulk*



### **MicroLite™ Super Nock®, Precision-molded, Press-fit**

*Fits FlatLine, standard-diameter carbon arrows and aluminum shafts with Super UNI Bushings*

*Colors: blaze, emerald, yellow, red, smoke*

*Packaging - dozen pack and 100-count bulk*



### **X10® Overnock, Precision-molded, Indexable**

*Fits X10, see arrow models for fitment*

*Colors: orange, yellow, green*

*Packaging - dozen pack*



### **H Nock™, Precision-molded, Press-fit**

*Fits ST Epic, ST Epic Camo, ST Epic Junior & ST Excel*

*Colors: black, white, blue, yellow, green, orange, deep red, pink*

*Packaging - dozen pack*

## CONVENTIONAL NOCKS



### **Conventional Nock - Swaged Shafts**

*Fits swaged aluminum arrows*

*Colors: black, green, orange, white, blue, red, purple, teal*

*Packaging - dozen pack and 100-count bulk*



# CRESTING & FLETCHING

On the field or on the hunt, Easton has arrow accessories designed for performance and customization.

## Spin Wing Vanes®



1.75-inch vanes in black, white, blue, red, and yellow

available in right or left

Packaging - 50-count bag

Colors ● Black ○ White ● Blue ● Red ● Yellow

## BTV™ Crossbow Vanes

- Height and profile designed specifically for high-powered crossbows
- Stiffening ridge cuts flutter at high speeds
- Increases accuracy and tightens broadhead groups



Size	Length (Inches)	Height (Inches)	Weight (Grains)	Colors	Packaging
300	3.00	.500	10	● Bright Green ● Fire Orange ● Yellow ○ White ● Red	Clamshell or 100-count bag

All weights are within  $\pm 0.5$  grain.

## Diamond Vanes®



Size	Length (Inches)	Height (Inches)	Weight (Grains)	Colors	Packaging
175	1.750	.375	3	● Bright Green ● Fire Orange	Clamshell or 100-count bag
235	2.375	.375	4	● Sunset Gold ○ White	
280	2.875	.500	6	● Yellow ● Black	
380	3.875	.500	8		

All weights are within  $\pm 0.5$  grain.

## Tite Flight™ Vanes

Special rib adds stiffness to cut in-flight flutter and noise.

Shield is 200 Only



Size	Length (Inches)	Height (Inches)	Weight (Grains)	Colors	Packaging
175	1.750	.375	3	● Bright Green ● Fire Orange	100-count bag
200	2.000	.330	4	● Black ● Hot Pink ● Yellow ○ White	

All weights are within  $\pm 0.5$  grain.

## Feathers



Size	Length (Inches)	Height (Inches)	Weight (Grains)	Colors	Packaging
3.0 R	3.000	.400	1.3	● Black ● Orange	Clamshell or 100-count bag
4.0 R	4.000	.550	2.8	● Blue ● Red	
5.0 R	5.000	.600	4.5	● Brown ○ White	
				● Yellow FL ● Yellow	
				● Green ● Chartreuse	

All weights are within  $\pm 0.5$  grain.




**Fastset Gel™**  
3- and 9-gram tubes  
One per clamshell package



**Diamond™ Arrow Crests**  
Sold in 12 pack



**FletchTite® Platinum**  
22-gram tube  
One per clamshell package

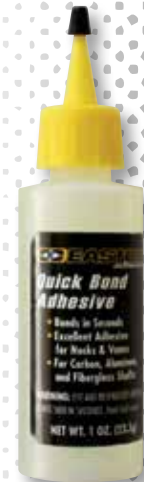


**Quick Bond Adhesive**  
1-oz. bottle  
One per clamshell package

FletchTite is a registered trademark of Bohning Adhesives Co., Ltd  
Spin Wing Vane is a registered trademark of Range-O-Matic Archery Company  
Fastset Gel is a trademark of Arizona Archery Elite

## Diamond Crests™

- Tube design for easy shrink application
- Applies in seconds using hot water
- No messy removal process

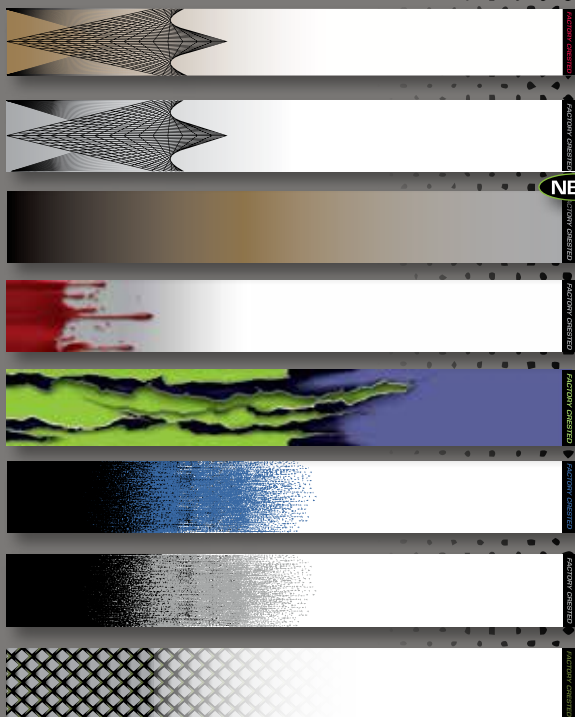

A/C Injexion Gold - 7"

Carbon Injexion Silver - 7"

**NEW**

HEXX/ACC Pro Hunting - 7"

BloodLine - 7"

WildThing - 7"

10N Blue - 7"

10N Silver - 7"

AXIS Weave - 7"

Custom Diamond Wraps — (shown flat to display full design)



Tribal Spider - 7"

Skull Fade - 7"

Pink Flame - 7"

Blue Flame - 7"

Green Flame - 7"

Orange Flame - 7"

Tribal Buck - 7"

Zig Zag - 7"

Easton Black & Tan - 7"

## QUIKFLETCH™

Patent No. 7,074,143

### Easton QuikFletch™ Crests

- Re-fletch arrows in seconds using hot water
- Easy to install and easy to replace
- Hunting models made with Blazer Broadhead vanes
- Target models made with popular, and super accurate 3" Diamond Vanes



### QuikFletch: Color Options

#### Tribal Buck - 7"

Red/White Blazers®  
Yellow/White Blazers®

#### Green Flame - 7"

Green/White Blazers®  
Green/Yellow Blazers®

#### Buck Fade - 7"

Orange/White Blazers®  
Hot Pink/White Blazers®

#### Target Red - 5.5"

Yellow/White 3" Diamond vanes  
Red/White 3" Diamond vanes

#### Target Yellow - 5.5"

Orange/White 3" Diamond vanes  
Green/White 3" Diamond vanes

"Manufactured by NAP QuikFletch® Exclusively for Easton"  
U.S. Patent No. 7,074,143

Blazer is a registered trademark of The Bohning Company, Ltd.



# APPAREL, DECALS, & TOOLS

## Easton T-shirts & Hoodie

Men: S-3XL (All sizes U.S. Standard)



*Slash Logo Tee*



*Gray Fade Hat - adjustable velcro strap*



*APG Camo Hat - adjustable velcro strap*



*Vintage Logo Tee & Sweatshirt*



*Last Chance Buck Long-sleeve Tee*

## Gear Wallet

(10" w X 8" h X 2" d)

Features 22 compartments designed to hold all of your accessories such as pliers, allen wrenches, arrow & broadhead components, serving tool, release aids, and adhesives.

Extra pages available.



Velcro is a registered trademark of Velcro Industries B.V.

## Screen-Printed Vinyl Decals



**Easton® Stacked Logo**  
5 1/4" x 3" One per package



**Easton® Arrows Logo**  
7" x 1" One per package



**Archery Recurve Shooter**  
6" x 4 1/2" One per package



### Pro Archery Pliers

A must for serious bow mechanics. Manufactured from the highest quality materials for reliable, long-lasting performance.

- Nock-set crimper and remover
- D-loop stretcher
- Needle-nose pliers
- Extra sharp side cutters
- Durable, comfortable grip



### Pro Allen Wrench

- Specific sizes for archery equipment
- Anodized aircraft-aluminum handle
- Cr-V steel for strength and durability
- Chrome-plated to resist rust
- Split-ring attachment for convenient carrying
- Standard sizes (blue): 3/16, 5/32, 9/64, 1/8, 7/64, 3/32, 5/64, 1/16, .050
- XL sizes (orange): 1/4, 7/32, 3/16, 5/32, 9/64, 1/8, 7/64, 3/32, 5/64



Extra Large Size

Standard Size



**Bow String Wax**  
One per clamshell package



**Hot Melt Adhesive**  
Low-temperature 3" x 1/2" stick  
One per clamshell package



**Bond-All™ — Insert glue**  
3- and 9-gram tubes  
One per clamshell package



**HIT® Epoxy Syringe**  
Provides a permanent bond  
Flexible, non-brittle formula



# X10® A/C/E™ STABILIZERS

Utilizes the same arrow technology that continually sends archers to the winner's podium. Easton incorporates the proven alloy/carbon lay-up with vibration damping designs into the most advanced stabilizers available.

## X10® System (patent-pending)

Integrates proven A/C construction. Utilizes a technologically advanced visco-elastic dampening membrane and high-modulus carbon weave. The Tri-Layer Suppressor™ system steadies aim, accelerates recovery, and minimizes hand shock & arm fatigue. Incorporates Advanced Vibration Reduction System (AVRS).™



Stabilizer



Side Rod




V-Bar Extender

### X10® Stabilizer Features

- Precision A/C construction
- Tri-Layer Suppressor technology
- Visco-elastic damping membrane
- AVRS (Advanced Vibration Reduction System)
- Includes weight cap

## A/C/E™ System


Wins more recurve and compound championships than any other stabilizer. Three length/weight combinations. Customize with Vari-Weights to balance any setup.



Stabilizer



Side Rod



V-Bar Extender

### A/C/E™ Stabilizer Features

- A/C construction
- Ultra-light design
- AVRS (Advanced Vibration Reduction System)
- Accepts Vari-Weight components
- Includes weight cap

# X7™ STABILIZER

## X7™ System

Incorporates a precision aerospace alloy body and AVRS system for smooth silky shooting and tight groups. Small diameter performs better in the wind. Provides a lightweight foundation for bow-stabilizing systems. Detailed chrome Permagraphics™ stand out on the shooting line. Two popular lengths.



Stabilizer



Side Rod



V-Bar Extender

### X7 Stabilizer Features


- Aerospace alloy construction
- AVRS (Advanced Vibration Reduction System)
- Small diameter
- Durable PermaGraphic finish
- Accepts Vari-Weight components
- Includes weight cap

## X10® Stabilizer Construction

Visco-elastic dampening membrane.

Exclusive process fuses the carbon fiber to the alloy core.

High-modulus carbon fiber provides exceptional strength and minimizes weight.

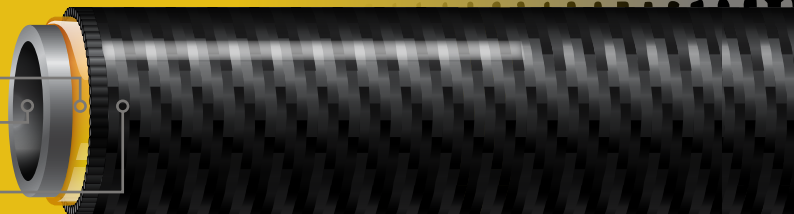

**Marcella Tonioli**

World Championship & World Cup Medalist



**Andrea Gales**

World Cup Stage Champion



### V-Bars™ with Bolt

- Works with all Easton stabilizer systems
- Black hard-anodize finish
- 35° flat and 35° X 17° down-angle models
- 5/16" stainless-steel connector bolt included
- 4.2 oz (119 grams)



### Adjustable Uni-Bar™

Use alone as an offset bar or two simultaneously to form the ultimate adjustable V-Bar system. Machined from aerospace aluminum and protected by a black, hard-anodize finish. Joints utilize strong nylon teeth that provide multiple points of adjustment and assure that setup will not slip.

- Available as a single offset or as a paired adjustable V-Bar
- Virtually infinite adjustment
- Durable, squared adjustment teeth
- Bright-black anodized finish
- 5/16" stainless-steel connector bolt included



### Vari-Weights



### Stainless Steel Vari-Weights

Module	1.5	43
1/2 Module	0.75	21
Cap	1.5	43

### X10° System

	X10 Stabilizer			X10 Side Rod			X10 V-Bar Extender	
Size	24 in 61 cm	28 in 71 cm	32 in 81 cm	8 in 20 cm	10 in 25 cm	12 in 30 cm	4 in 10 cm	5 in 13 cm
Ounces	4.4	4.7	5.0	1.5	1.7	1.8	1.1	1.2
Grams	125	133	142	43	48	51	31	34

### A/C/E™ System

	A/C/E Stabilizer			A/C/E Side Rod			A/C/E V-Bar Extender	
Size	24 in 61 cm	29 in 74 cm	34 in 86 cm	9 in 23 cm	10 in 25 cm	11 in 28 cm	4 in 10 cm	5 in 12.5 cm
Ounces	4.3	5.0	6.0	1.7	1.8	1.9	1.3	1.3
Grams	122	142	170	48	51	54	37	37

### X7™ System

	X7 Stabilizer		X7 Side Rod		X7 V-Bar Extender
Size	25 in 64 cm	30 in 76 cm	10 in 25 cm		4 in 10 cm
Ounces	6.1	6.8	2.3		1.5
Grams	173	193	65		43

MADE IN  
USA



# SHOOTING ACCESSORIES

The world's top archers shoot the best arrows and need the best gear. Building upon the feedback and advice of professional archers, Easton designs shooting accessories that will bring your game to the next level.

## Easton QH100™ Hip & QF50™ Field Quivers

- Sturdy nylon and molded foam body for lightweight strength
- Oversize compartments
- Zippered external pocket
- Internal pocket dividers
- Top pocket for releases, pens, or smart phones
- Bow square slot
- D-rings
- Molded arrow separators
- Available in right or left hand configurations

### Colors:

- |          |         |                 |
|----------|---------|-----------------|
| ● Red    | ● Blue  | ● Purple        |
| ○ Silver | ○ Green | ○ Realtree Camo |

QH100™ Quiver



Camo available Spring 2013

QF50™ Quiver



## Quiver Belt

- Snap adjustments
- Padded foam construction
- Sold separately
- Small (18-30")*
- Medium (28-40")*
- Large (38-50")*



Quiver Belt

Camo available Spring 2013

## Range Lite™ Quiver

- Lightweight design
- Molded shank & arrow separator
- Easy-access pockets
- Top pocket for releases, pens, or smart phones

Available in right or left hand configurations

### Colors:

● Red ● Blue ● Silver ● Realtree Camo

## Release Pouch

- Extra-sturdy design
- Holds up to four releases
- Draw string top protects against the elements
- Zippered external pocket
- Internal divider



## Chest Protector

- Unique comfort-fit design
  - Breathable air-mesh construction
  - Easy-adjust Velcro® shoulder
- (Offered in RH & LH models—XS, S, M, L, XL, XXL)

### Colors:

Black/White

## Wrist Slings

- Durable, lightweight neoprene construction
- Easy-adjust strap

Designs: Arrow, Elk, Whitetail, & Diamond Plate



Camo available Spring 2013

## Range Lite™ Quiver

### Arm Guards

Progressive designs molded from durable, polycarbonate material. Innovative magnetic buckle allows for easy, one-hand fastening. Durable elastic straps ensure a snug fit. Available in oval and bone configurations.

### Colors:

● Red ● Blue ● Smoke ● Yellow





# PRO TOUR LINE-UP

Authentic apparel worn by Easton Team archers. Designed for performance, Easton's Pro Tour gear means your only concern will be beating the competition.

## Visor

Sizes: One Size Fits All



## Hat

Sizes: S/M, L/XL



## Shooter Towel



## PRO TOUR™ Team Jersey

- Quick-dry moisture management

- Lightweight fabric

Women: XS-XL

Men: S-4XL



## PRO TOUR™ Jacket & Vest

- Soft-shell tech fabric

- Micro fleece lining

- Welded sleeve pocket

- Vest also available

Sizes: S-XXL



## Compression Shirts

- Thermal dynamic for comfort in hot or cold conditions

- Wicks moisture

- Compression comfort

- Layer under shooter jerseys or hunting clothing

Offered in white & black

Sizes: S-XXL



## PRO TOUR™ Hip & Field Quiver

Preferred choice of outdoor target archers

- Constructed of advanced technical fabrics for lightweight handling and superior durability

- Engineered polymer arrow separator

- Oversized storage compartments

- Internal pocket organization system

- Magnetic closure, easy-access pocket

- Integrated bow-square slot

- Premium embroidered logos

- Self-healing bi-directional zippers

- Multiple D-rings and accessory attachment points

- Available in right and left hand models



### Elite™ Bow Case

47"W x 17.5"H x 6"D

- Heavy-duty locking zippers
- Weather-resistant fabric
- Oversized external pockets designed for Arrow Tote or stabilizer storage
- Two main compartments
- Lightweight design for travel and everyday use
- Separate clothing storage

*(Equipment & apparel shown sold separately)*



### PRO TOUR™ Sunglasses

Pro Tour sunglasses are perfect on the field and in the field. Features a flexible, ergonomic design with soft rubber nose and flexible ear pieces. Maximum comfort and secure fit, UV protective, shatter-resistant lenses. Feather-light for comfort, Pro Tour sunglasses weigh less than 1 oz. so you'll hardly know you're wearing them. Flat black & charcoal frames with titanium color lenses.

### Arrow Travel Tote

- Locking adjustment 24" to 40"
- Threaded closure
- Holds up to two-dozen arrows
- Shoulder strap included
- Fits inside most hard and soft bow cases

*(Tote and Recurve Pack sold separately)*



### PRO TOUR™ Recurve Pack

27"W x 12.5"H x 7.5"D

- Three oversized external accessory pockets
- Individual storage for stabilizers, arrows, limbs, and other accessories
- Removable gear folder
- Removable riser/limb case
- Integrated quick-access rain cover
- Easy-access stabilizer storage (fits any length stabilizer)
- External tripod/spotting scope storage

*(Equipment shown & travel cover sold separately)*





# TARGET ARROW SIZE SELECTION

## Using the Target Arrow Selection Chart


- Once you have determined your Correct Target Arrow Length and Calculated or Actual Peak Bow Weight, you are ready to select your correct shaft size:
  - Compound bows.** In the "Calculated Peak Bow Weight" column (left-hand side of the chart), select the column with the type cam on your bow. Locate your Calculated Peak Bow Weight in that column.
  - Recurve bows and Modern Longbows.** In the "Actual Peak Bow Weight" column (right-hand side of the chart), select the column with the bow type. Next, locate your Actual Peak Bow Weight in that column.
- Move across that bow-weight row horizontally to the column indicating your Correct Arrow Length. Note the letter in the box where your Calculated or Actual Peak Bow Weight row and Correct Target Arrow Length column intersect. The "Shaft Size" box below the chart with the same letter contains your recommended shaft sizes. Select a shaft from the chart depending on the shaft material, shaft weight, and type of shooting you will be doing. For larger game, you should use heavier shafts.

## Selecting the Correct Target Shaft Size

Our Target Shaft Selection Chart will help you find the perfect shaft match for your bow—quickly and easily. Advanced, interactive Spine Weight Comparison and Target Shaft Selection Charts are now available online at [www.eastonarchery.com](http://www.eastonarchery.com).

### 1. Determining Correct Target Arrow Length

The Correct Arrow Length for bows (including bows with overdraws) is determined by drawing an extra-long arrow to full draw and having someone mark the arrow one inch in front of where the arrow contacts the most forward portion of the arrow rest.

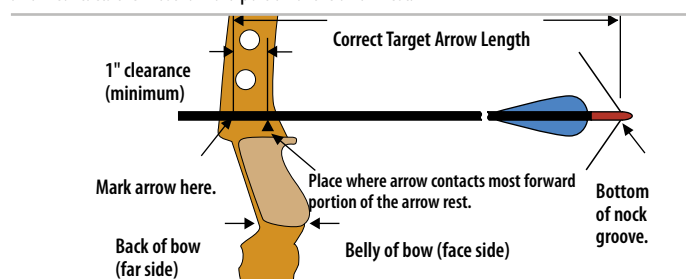

**Bow Draw Length.** Draw length is measured at full draw from the bottom of the nock groove to the back (far side) of the bow. Actual arrow length and draw length are only the same if the end of the arrow shaft is even with the back of the bow (far side) at full draw.



Note: Correct arrow length is measured from throat (string hole) of the nock to end of the shaft, not including point or insert.

### 2. Determining Actual Peak Bow Weight—Compound Bows

Compound bows must be measured at the peak bow weight as the bow is being drawn and not while letting the bow down.

The suggested shaft sizes in the charts were determined using a "Standard" Setup which includes:

- Use of a release aid
- Compound bow with brace height greater than 6½"

If your setup differs from the "Standard" Setup, use the **Variables** (following) to make adjustments to determine the Calculated Peak Bow Weight so the correct arrow size can be selected on the chart.

#### Variables to the "Standard" Setup for Compound Bows

- Point weight over 100 grains – Add 3 lbs. for each 25 grains heavier than 100 grains.
- Bows with brace heights less than 6½" – Add 5 lbs.
- Finger release – Add 5 lbs.

## Correct Arrow Length for Low Poundage Target

21"	22"	23"	24"	25"	26"	27"	RECURVE BOW Bow Weight - lbs. Finger Release
		Y1	Y1	Y2	Y3	Y4	16-20 lbs. (7.3-9.1 kg)
	Y1	Y1	Y2	Y3	Y4	Y5	20-24 lbs. (9.1-10.9 kg)
Y1	Y1	Y2	Y3	Y4	Y5	Y6	24-28 lbs. (10.9-12.7 kg)
Y1	Y2	Y3	Y4	Y5	Y6	Y7	28-32 lbs. (12.7-14.5 kg)
Y2	Y3	Y4	Y5	Y6	Y7		32-36 lbs. (14.5-16.3 kg)
Y3	Y4	Y5	Y6	Y7			36-40 lbs. (16.3-18.1 kg)

Note: If your arrow shaft is longer than inch length shown, round-up to the next longer increment.

Size	Spine	Model	Weight Grs/Inch	Size	Spine	Model	Weight Grs/Inch
Group Y1				Group Y2			
1214	2.501	75	5.9	1413	2.036	75	5.9
Group Y3				Group Y4			
1413	2.036	75	5.9	1500	1.500	A/C/G	4.7
1416	1.684	75	7.2	2-00	1.500	A/C/C	4.7
				1416	1.684	75	7.2
Group Y5				Group Y6			
1250	1.250	A/C/E	5.1	1150	1.150	Carb1	5.0
1300	1.300	A/C/G	5.1	1250	1.250	A/C/E	5.1
3L-00	1.300	A/C/C	5.1	1150	1.150	A/C/G	5.5
1514	1.379	X7	6.8	3-00	1.150	A/C/C	5.5
1516	1.403	75	7.3	1516	1.403	75	7.3
				1614	1.153	X7	7.7
Group Y7				Key			
1000	1.000	A/C/E	5.7	A/C/E	Aluminum/Carbon/Extreme		
1100	1.100	A/C/E	5.1	X10	X10 Shafts (Aluminum/Carbon)		
1000	1.000	X10	5.3	A/C/G	A/C/G (Aluminum/Carbon)		
1000	1.000	A/C/G	5.7	A/C/C	Aluminum/Carbon/Composite		
3-00	1.150	A/C/C	5.5	Carb1	Carbon One N-FUSED® Carbon		
1000	1.000	Carb1	5.0	X7	X7 Eclipse (7178 alloy)		
1614	1.153	X7	7.7	75	XX75: Platinum Plus, Tribute, Jazz and Neos (7075 alloy)		
1616	1.079	75	8.4				

Note: To determine weight at your shaft length, multiply the grains-per-inch (gpi) by your actual shaft length not including point, insert, or UNI Bushing.

### Overdraw Compound Bows

If you are using an overdraw, make the variable calculations (if any), and then modify the Calculated Peak Bow Weight of your bow using the chart below.

#### Length of Overdraw

Bow Weight	1"	2"	3"	4"	5"
For 50#-70# Actual/Calculated Peak Bow Weight, add to bow weight—	1#	3#	6#	9#	12#




### 3. Determining Actual Peak Bow Weight—Recurve and Modern Longbows

Your local archery pro shop is the best place to determine the actual draw weight of your bow. Actual Peak Bow Weight for recurve bows and longbows should be measured at your draw length.

Visit an Easton dealer equipped with the Bow Force Mapping System for expert arrow selection and bow analysis.

**COMPOUND BOW - Release Aid**  
Calculated Peak Bow Weight - lbs.

# Correct Arrow Length for Target • Field • 3D

Soft Cam  ATA up to 210 FPS IBO up to 260 FPS	Medium Cam  ATA 211-230 FPS IBO 261-290 FPS	Single or Dual Hard Cam  ATA 231 FPS up IBO 291 FPS up	23"	24"	25"	26"	27"	28"	29"	30"	31"	32"	RECURVE BOW Bow Weight - lbs. Finger Release
<b>29-35 lbs.</b> (13.2-15.9 kg)			00	01	02	03	T1	T2	T3				<b>17-23 lbs.</b> (7.7-10.4 kg)
<b>35-40 lbs.</b> (15.9-18.1 kg)	<b>29-35 lbs.</b> (13.2-15.9 kg)		01	02	03	T1	T2	T3	T4	T5			<b>24-29 lbs.</b> (10.9-13.2 kg)
<b>40-45 lbs.</b> (18.1-20.4 kg)	<b>35-40 lbs.</b> (15.9-18.1 kg)	<b>29-35 lbs.</b> (13.2-15.9 kg)	02	03	T1	T2	T3	T4	T5	T6	T7		<b>30-35 lbs.</b> (13.6-15.9 kg)
<b>45-50 lbs.</b> (20.4-22.7 kg)	<b>40-45 lbs.</b> (18.1-20.4 kg)	<b>35-40 lbs.</b> (15.9-18.1 kg)	03	T1	T2	T3	T4	T5	T6	T7	T8	T9	<b>36-40 lbs.</b> (16.3-18.1 kg)
<b>50-55 lbs.</b> (22.7-24.9 kg)	<b>45-50 lbs.</b> (20.4-22.7 kg)	<b>40-45 lbs.</b> (18.1-20.4 kg)	T1	T2	T3	T4	T5	T6	T7	T8	T9	T10	<b>41-45 lbs.</b> (18.6-20.4 kg)
<b>55-60 lbs.</b> (24.9-27.2 kg)	<b>50-55 lbs.</b> (22.7-24.9 kg)	<b>45-50 lbs.</b> (20.4-22.7 kg)	T2	T3	T4	T5	T6	T7	T8	T9	T10	T11	<b>46-50 lbs.</b> (20.9-22.7 kg)
<b>60-65 lbs.</b> (27.2-29.5 kg)	<b>55-60 lbs.</b> (24.9-27.2 kg)	<b>50-55 lbs.</b> (22.7-24.9 kg)	T3	T4	T5	T6	T7	T8	T9	T10	T11	T12	<b>51-55 lbs.</b> (23.1-24.9 kg)
<b>65-70 lbs.</b> (29.5-31.8 kg)	<b>60-65 lbs.</b> (27.2-29.5 kg)	<b>55-60 lbs.</b> (24.9-27.2 kg)	T4	T5	T6	T7	T8	T9	T10	T11	T12	T13	<b>56-60 lbs.</b> (25.4-27.2 kg)
<b>70-76 lbs.</b> (31.8-34.5 kg)	<b>65-70 lbs.</b> (29.5-31.8 kg)	<b>60-65 lbs.</b> (27.2-29.5 kg)	T5	T6	T7	T8	T9	T10	T11	T12	T13	T13	<b>61-65 lbs.</b> (27.7-29.5 kg)
<b>76-82 lbs.</b> (34.5-37.2 kg)	<b>70-76 lbs.</b> (31.8-34.5 kg)	<b>65-70 lbs.</b> (29.5-31.8 kg)	T6	T7	T8	T9	T10	T11	T12	T13	T13	T14	<b>66-70 lbs.</b> (29.9-31.8 kg)
<b>82-88 lbs.</b> (37.2-39.9 kg)	<b>76-82 lbs.</b> (34.5-37.2 kg)	<b>70-76 lbs.</b> (31.8-34.5 kg)	T7	T8	T9	T10	T11	T12	T13	T13	T14		<b>71-76 lbs.</b> (32.2-34.5 kg)


■ No X10, ProTour, or ACE suitable in shaded areas above. Note: If your arrow shaft is longer than inch length shown, round-up to the next longer increment.







Size	Spine	Model	Weight Grs/inch	Size	Spine	Model	Weight Grs/inch	Size	Spine	Model	Weight Grs/inch	Size	Spine	Model	Weight Grs/inch
<b>Group 00</b>				<b>Group 01</b>				<b>Group 02</b>				<b>Group 03</b>			
1214	2.501	75	5.9	2-00	1.500	A/C/G	4.7	1250	1.250	A/C/E	5.1	1100	1.100	A/C/E	5.1
1413	2.036	75	5.9	1500	1.500	A/C/G	4.7	1300	1.300	A/C/G	5.1	1150	1.150	A/C/G	5.5
				1416	1.684	75	7.1	3L-00	1.300	A/C/C	5.1	3-00	1.150	A/C/C	5.5
				1516	1.403	75	7.3	1514	1.379	X7	6.8	1614	1.153	X7	6.8
<b>Group T1</b>				<b>Group T2</b>				<b>Group T3</b>				<b>Group T4</b>			
*920-1000R	0.920-1.000	A/C/E	5.8	*780-850R	0.780-0.850	A/C/E	6.0	*720-780R	0.720-0.780	A/C/E	6.4	*670-720R	0.670-0.720	A/C/E	5.9
*900-1000R	0.900-1.000	X10	5.8	*750-830R	0.750-0.830	X10	6.4	*700-750R	0.700-0.750	X10	6.7	*650-700R	0.650-0.700	X10	6.8
*880-1000R	0.880-1.000	A/C/G	5.9	770	0.770	ProTour	6.0	720	0.720	ProTour	6.2	670	0.670	ProTour	6.5
2L-04	1.020	A/C/C	6.1	*810-880R	0.810-0.880	A/C/G	6.1	*710-810R	0.710-0.810	A/C/G	6.5	*660-710R	0.660-0.710	A/C/G	6.9
2L-04	0.920	A/C/C	6.5	2-04	0.920	A/C/C	6.5	3X-04	0.830	A/C/C	6.7	3L-04	0.750	A/C/C	7.0
900	0.900	Carb1	5.3	810	.810	Carb1	5.8	3L-04	0.750	A/C/C	7.0	3-04	0.680	A/C/C	7.2
1713	1.044	75	7.4	1714	0.963	X7	8.1	730	0.730	Carb1	6.0	660	0.660	Carb1	6.6
1714	0.963	X7	8.1	1716	0.880	75	9.0	1813	0.874	75	7.9	1913	0.733	75	8.3
1616	1.079	75	8.4					1814	0.799	X7	8.6	1914	0.658	X7	9.3
								1816	0.756	75	9.3				
<b>Group T5</b>				<b>Group T6</b>				<b>Group T7</b>				<b>Group T8</b>			
*620-670R	0.620-0.670	A/C/E	6.1	*570-620R	0.570-0.620	A/C/E	6.3	*520-570R	0.520-0.570	A/C/E	6.7	*470-520R	0.470-0.520	A/C/E	6.8
*600-650R	0.600-0.650	X10	7.0	*550-600R	0.550-0.600	X10	7.5	*500-550R	0.500-0.550	X10	7.8	*450-500R	0.450-0.500	X10	8.1
620	0.620	ProTour	6.7	570	0.570	ProTour	6.9	520	0.520	ProTour	7.3	470	0.470	ProTour	7.6
620	0.620	Pro Field	6.1	570	0.570	Pro Field	6.4	520	0.520	Pro Field	6.7	470	0.470	Pro Field	7.0
*610-660R	0.610-0.660	A/C/G	7.3	*540-610R	0.540-0.610	A/C/G	7.7	*540-610R	0.540-0.610	A/C/G	7.7	*480-540R	0.480-0.540	A/C/G	8.4
3-04	0.680	A/C/C	7.2	3L-18	0.620	A/C/C	7.5	3-18	0.560	A/C/C	7.8	3-28	0.500	A/C/C	8.1
660	0.660	Carb1	6.6	600	0.600	Carb1	6.9	3-28	0.500	A/C/C	8.1	3-39	0.440	A/C/C	8.6
2013	0.610	75	9.0	500	0.500	LSpd	6.5	550	0.550	Carb1	6.9	500	0.500	Carb1	7.4
1914	0.658	X7	9.3	500	0.500	FB	7.1	500	0.500	LSpd	6.5	500	0.500	LSpd	6.5
1916	0.623	75	10.0	2013	0.610	75	9.0	500	0.500	FB	7.1	500	0.500	FB	7.1
				2014	0.579	X7	9.6	2212	0.505	X7	8.8	2212	0.505	X7	8.8
				1916	0.623	75	10.1	2114	0.510	X7, 75	9.9	2213	0.460	X7, 75	9.9
								2016	0.531	75	10.6	2114	0.510	X7, 75	9.9
<b>Group T9</b>				<b>Group T10</b>				<b>Group T11</b>				<b>Group T12</b>			
*430-470R	0.430-0.470	A/C/E	7.0	*400-430R	0.400-0.430	A/C/E	7.5	*370-400R	0.370-0.400	A/C/E	7.9	370R	0.370	A/C/E	7.9
*410-450R	0.410-0.450	X10	8.5	*380-410R	0.380-0.410	X10	8.9	380R	0.380	X10	8.9	3-60	0.340	A/C/C	9.5
420	0.420	ProTour	8.0	380	0.380	ProTour	8.4	380	0.380	ProTour	8.4	3-71	0.300	A/C/C	9.9
420	0.420	Pro Field	7.5	380	0.380	Pro Field	7.8	380	0.380	Pro Field	7.8	340	0.340	LSpd	8.2
*430-480R	0.430-0.480	A/C/G	8.9	*430-480R	0.430-0.480	A/C/G	8.9	3-49	0.390	A/C/C	8.8	340	0.340	FB	8.3
3-39	0.440	A/C/C	8.6	3-39	0.440	A/C/C	8.6	3-60	0.340	A/C/C	9.5	350	0.350	FBORE	8.4
450	0.450	Carb1	8.1	3-49	0.390	A/C/C	8.8	400	0.400	LSpd	7.4	2511	0.348	X7	9.6
400	0.400	LSpd	7.4	410	0.410	Carb1	8.5	400	0.400	FB	7.8	2512	0.321	X7	10.3
400	0.400	FB	7.8	400	0.400	LSpd	7.4	350	0.350	FBORE	8.4	2612	0.285	X7	10.7
2311	0.450	X7	8.9	400	0.400	FB	7.8	2413	0.365	X7, 75	10.5	2613	0.265	X7	11.5
2312	0.423	X7	9.5	2413	0.365	X7, 75	10.5	2314	0.390	X7, 75	10.8	2712	0.260	X7	11.3
2213	0.460	X7, 75	9.9	2214	0.425	X7	10.4	2315	0.340	X7, 75	11.8				
2214	0.425	X7	10.4	2314	0.390	X7, 75	10.8	2511	0.348	X7	9.6				
2115	0.461	75	10.8	2412	0.400	X7	9.7								
<b>Group T13</b>				<b>Group T14</b>				<b>A/C/E</b>				<b>R</b>			
3-71	0.300	A/C/C	9.9	2613	0.265	X7	11.5	<b>X10</b>	Aluminum/Carbon/Extreme			The size recommendations for recurve bows are indicated with a letter "R" next to the size. Indicates suggested arrow size. Spine of arrow size shown (static) Designates arrow model Listed in grains per inch			
2512	0.321	X7	10.3	2712	0.260	X7	11.3	<b>ProTour</b>	X10 Shafts (Aluminum/Carbon)						
2612	0.285	X7	10.7					<b>Pro Field</b>	X10 ProTour Shafts (Aluminum/Carbon)						
2613	0.265	X7	11.5					<b>A/C/G</b>	A/C Pro Field (Aluminum/Carbon)						
2712	0.260	X7	11.3					<b>A/C/C</b>	A/C/G (Aluminum/Carbon)						
								<b>Carb1</b>	Aluminum/Carbon/Composite			<b>* When two sizes are listed together, the weight listed is for the first shaft.</b>			
								<b>LSpd</b>	Carbon One						
								<b>FB</b>	LightSpeed & LightSpeed 3D						
								<b>FBORE</b>	FatBoy						
								<b>X7</b>	Full Bore						
								<b>75</b>	X7 Eclipse (7178-T9 alloy XX75: Platinum Plus, Tribute, Jazz and Neos (7075 alloy)						

\* Beaman Target Size Selection on pgs 22,23



## 2012 TARGET SHAFT MODELS

Alloy/Carbon	Pg #	Materials/Construction	Inserts	Points	Nock System	Nock Type	Weight Tolerance <sup>4</sup>	Straightness <sup>1</sup>	Color/Finish	Sizes
	8	High-strength carbon fiber bonded to a precision 7075 alloy core tube —barreled shaft	Not Available	X10 Ballistic Tungsten Break-off or X10 Stainless Steel Break-off	X10 Pin	Pin Nocks X10 Overnock	±0.5 grains	±.0015" guaranteed	Polished Black Carbon	1000, 900, 830, 750, 700, 650, 600, 550, 500, 450, 410, 380
<b>X10<sup>®</sup> PROTOUR<sup>™</sup></b>	10	High-strength carbon fiber bonded to a precision 7075 alloy core tube —single-taper shaft	Not Available	X10 Ballistic Tungsten Break-off or X10 Stainless Steel Break-off	X10 or ProTour Pin	Pin Nocks	±0.5 grains	±.0015" guaranteed	Polished Black Carbon	770, 720, 670, 620, 570, 520, 470, 420, 380
<b>A/C PRO FIELD<sup>™</sup></b>	11	High-strength carbon fiber bonded to a precision 7075 alloy core tube —single-taper shaft	A/C/E Insert	Screw-in, One-piece or A/C/E Stainless Steel Break-off	A/C/E Pin or Insert Nock	Pin Nocks	±0.5 grains	±.0015" guaranteed	Polished Black Carbon	620, 570, 520, 470, 420, 380
<b>A/C/E<sup>®</sup></b>	9	High-strength carbon fiber bonded to a precision 7075 alloy core tube —barreled shaft	A/C/E Insert	Screw-in, One-piece or A/C/E Stainless Steel Break-off	A/C/E Pin or Insert Nock	Pin Nocks or G Nock	±0.5 grains	±.0015" guaranteed	Polished Black Carbon	(1250, 1100) <sup>5</sup> , 1000, 920, 850, 780, 720, 670, 620, 570, 520, 470, 430, 400, 370
<b>A/C/G<sup>™</sup></b>	12	High-strength carbon fiber bonded to a precision 7075 alloy core tube	RPS Insert or Halfout Insert	One-piece Parabolic, NIBB, or RPS Point	UNI System	G Nock or Pin Nock	±0.5 grains	±.002" guaranteed	Black, Micro-smooth Finish	2-00, 3L-00, 3-00, 2L-04, 2-04, 3X-04, 3L-04, 3-04, 3L-18, 3-18, 3-28, 3-39, 3-49, 3-60, 3-71
<b>A/C/C<sup>®</sup></b>	13	High-strength carbon fiber bonded to a precision 7075 alloy core tube	A/C/E Insert	Screw-in, One-piece, A/C/E or A/C/G Stainless Steel Break-off	A/C/E & A/C/G Pin or Insert Nock	Pin Nocks or G Nock	±0.5 grain	±.002" guaranteed	Polished Black Carbon	1500, 1300, 1150, 1000, 880, 810, 710, 660, 610, 540, 480, 430

Carbon	Pg #	Materials/Construction	Inserts	Points	Nock System	Nock Type	Weight Tolerance <sup>4</sup>	Straightness <sup>2</sup>	Color/Finish	Sizes
	16	SuperLite Carbon multi-layer wrapped fibers		One-piece Bullet	Super or G Nock UNI System	3D Super Nock, Super Nock, or G Nock	±2 grains	±.003"	Black, Smooth-matte Finish	350
	17	SuperLite Carbon multi-layer wrapped fibers	RPS Insert	One-piece Bullet or RPS Point	Super or G Nock UNI System	3D Super Nock, Super Nock, or G Nock	±2 grains	±.003"	Black, Smooth-matte Finish	500, 400, 340
	25	SuperLite Carbon multi-layer wrapped fibers	RPS Insert	One-piece Bullet or RPS Point	Super Nock	3D Super Nock, Super Nock	±2 grains	±.003"	Black, Smooth-matte Finish	500
	15	SuperLite Carbon multi-layer wrapped fibers	CB Insert	CB or RPS Point	UNI System	G Nock	±2 grains	±.001"	Black, Smooth-matte Finish	500, 400, 340
	15	SuperLite Carbon multi-layer wrapped fibers	CB Insert	CB or RPS Point	UNI System	G Nock	±2 grains	±.003"	Black, Smooth-matte Finish	500, 400, 340
	24	Small diameter unidirectional purtruded carbon	CB Insert	CB or RPS Point	UNI System	G Nock	±2 grains	±.003"	Black, Smooth-matte Finish	500, 400, 340

N-FUSED <sup>®</sup> Carbon	Pg #	Materials/Construction	Inserts	Points	Nock System	Nock Type	Weight Tolerance <sup>4</sup>	Straightness <sup>2</sup>	Color/Finish	Sizes
<b>CARBONONE<sup>®</sup></b>	14	UltraLite Nano N-FUSED <sup>®</sup> carbon fibers	A/C/E Insert	Carbon One Stainless Steel Break-off	A/C/E Pin, Carbon One Pin, or insert Nock	Pin Nock, Pin G Nock, G Nock	±1 grains	±.003"	Black, Micro-smooth Finish	1150, 1000, 900, 810, 730, 660, 600, 550, 500, 450, 410

Alloy	Pg #	Aerospace Alloy	Strength <sup>3</sup> (psi)	Inserts	Points	Nock System	Nock Type	Weight Tolerance	Straightness <sup>1</sup>	Color/Finish	Sizes
<b>ECLIPSE<sup>™</sup></b>	18	7178-T9	105,000	Not Available	NIBB or One-piece Bullet	UNI or Super UNI System	3D Super Super Nock S Nock or G Nock	±3/4%	±.001" guaranteed	Hard-anodized Polished Black	1514, 1614, 1714, 1814, 1914, 2014, 2114, 2212, 2213, 2214, 2311, 2312, 2314, 2315, 2412, 2413, 2511, 2512, 2612, 2613, 2712
<b>PLATINUM<sup>PLUS</sup></b>	19	7075-T9	96,000	RPS Insert	NIBB, One-piece Bullet, or RPS Point	UNI or Super UNI System	3D Super Super Nock or S Nock	±1%	±.002" guaranteed	Hard-anodized Platinum Grey	1416, 1516, 1616, 1713, 1716, 1813, 1816, 1913, 1916, 2013, 2016, 2114, 2213, 2315
<b>TRIBUTE<sup>™</sup></b>	20	7075	90,000	RPS Insert 1716 & up	NIBB, One-piece Bullet, or RPS Point	Full-Diameter Taper Swage	Conventional	±2%	±.005" guaranteed	Hard-anodized Black	1214 <sup>6</sup> , 1413, 1416, 1516, 1616, 1716, 1816, 1916, 2016
<b>Jazz<sup>®</sup></b>	21	7075	90,000	RPS Insert 1716 & up	NIBB, One-piece Bullet, or RPS Point	Full-Diameter Taper Swage	Conventional or G Nock <sup>6</sup>	±2%	±.005" guaranteed	Hard-anodized Purple/Silver	1214 <sup>6</sup> , 1413, 1416, 1516, 1616, 1716, 1816, 1916, 2016
<b>Genesis<sup>™</sup></b>	22	7075	90,000	Not Available	One-piece Point	Full-Diameter Taper Swage	N nock	±2.5 grains	±.005" guaranteed	Hard-anodized Bright Blue, Orange	1820
<b>AEOS<sup>™</sup></b>	23	7075	90,000	Not Available	One-piece Point	Full-Diameter Taper Swage	Conventional	±5%	±.008" guaranteed	Hard-anodized Gold	1618

1 Guaranteed straight to more stringent standards than ATA/ASTM methods.

2 Guaranteed to meet or exceed similar carbon-industry straightness specifications.

3 Tensile strength value may vary ±3%.

4 Grains-per-shafts in a dozen bundle.

5 Special order only.

6 1214 size Jazz uses direct-fit G Nock.

Eclipse and Platinum Plus sizes in italics use UNI System and G Nock.

®/™ Registered Trademark/Trademark of Easton.

Every effort has been made to ensure the accuracy of this catalog. Graphics and images are for illustration purposes only. Due to our effort to improve our products, Easton reserves the right to make changes without notice. 2013 products available for sale on or after December 1, 2011.

# ALLOY SHAFT AND COMPONENT SPECIFICATIONS

Size	Shaft Weight		Spine @ 28" Span	Stock Length <sup>3</sup>		Conventional Nock Size <sup>4</sup>	UNI System <sup>5</sup>			One-piece Bullet Point	RPS <sup>7</sup> Insert Alum.	RPS <sup>7</sup> Point Size
	XX75 <sup>1</sup>	X7 <sup>2</sup>		75 <sup>1</sup>	X7 <sup>2</sup>		UNI Bushing <sup>6</sup>	Super UNI Bushing <sup>10</sup>	NIBB Point			
	Grains per Inch		Deflection in Inches	Inches		Inches	Grains	Grains	Grains <sup>8</sup>	Grains <sup>8</sup>	Grains <sup>8</sup>	Grains <sup>8</sup>
1214	5.9	—	2.501	26½	—	—	—	—	—	45	—	—
1413	5.9	—	2.036	26	—	7/32	—	—	—	35	—	—
1416	7.2	—	1.684	27	—	7/32	2	—	46	52	—	—
1514	—	6.8	1.379	—	26½	—	5	—	61 <sup>9</sup>	—	—	—
1516	7.3	—	1.403	27½	—	1/4	3	—	48	54	—	—
1614	—	7.7	1.153	—	28	—	5	—	51	—	—	—
1616	8.4	—	1.079	28½	—	1/4	5	—	56	63	—	—
1618	9.8	—	0.957	32½	—	1/4	—	—	—	50	—	—
1713	7.4	—	1.044	29	—	—	7	—	54	—	—	—
1714	—	8.1	0.963	—	29	—	7	—	56	—	—	—
1716	9.0	—	0.880	29	—	1/4	7	—	60	68	10	17/64
1813	7.9	—	0.874	30	—	1/4	8	—	56	—	14	9/32
1814	—	8.6	0.799	—	29½	—	8	—	60	—	—	—
1816	9.3	—	0.756	30	—	9/32	8	—	63	74	12	9/32
1820	12.2	—	0.592	29½	—	9/32	—	—	—	59	—	—
1913	8.3	—	0.733	31	—	9/32	9	—	64	—	18	5/16
1914	—	9.3	0.658	—	30½	—	9	—	64	—	—	—
1916	10.0	—	0.623	31	—	9/32	9	—	72	82	16	5/16
2013	9.0	—	0.610	32	—	—	—	5	68	—	21	5/16
2014	—	9.6	0.579	—	31½	—	(10)	5	71	—	—	—
2016	10.6	—	0.531	32	—	—	—	4	80	90	20	5/16
2114	9.9	9.9	0.510	31	32½	—	(11)	7	78	100	25	5/16
2212	—	8.8	0.505	—	32½	—	(13)	9	102 <sup>9</sup>	100	31	11/32
2213	9.8	9.9	0.458	31	33½	—	(13)	9	88	100	30	11/32
2214	—	10.4	0.425	—	33	—	(13)	9	103 <sup>9</sup>	100	—	—
2311	—	8.9	0.450	—	33	—	(15)	11	99 <sup>9</sup>	100	37	11/32
2312	—	9.5	0.423	—	33	—	(15)	11	99 <sup>9</sup>	100	37	11/32
2314	10.7	10.8	0.391	32	33½	—	(14)	10	—	100	34	11/32
2315	11.7	11.8	0.342	32	34	—	—	11	—	100	37	11/32
2412	—	9.7	0.400	—	34	—	(17)	12	110	100	40	11/32
2413	—	10.5	0.365	—	34	—	(17)	12	110	100	40	11/32
2511	—	9.6	0.348	—	34	—	(20)	15	108 <sup>9</sup>	100	52	11/32
2512	—	10.3	0.321	—	34½	—	(20)	15	108 <sup>9</sup>	100	52	11/32
2612	—	10.7	0.285	—	34½	—	(22)	17	—	150	58	3/8
2613	—	11.5	0.265	—	34½	—	(22)	17	—	150	58	3/8
2712	—	11.3	0.260	—	34½	—	—	19	—	150/300	—	—

— Indicates not available

1 XX75 Tribute, Jazz, and Platinum Plus.

2 X7 Eclipse.

3 Length is approximate stock shaft length for each size.

4 Nock size for conventional swaged nock taper.

5 UNI—Universal Nock Installation System.

6 Parentheses indicate smaller G Nock UNI Bushing size is available as an optional accessory.

7 RPS = Replaceable Point System with 8-32 ATA Standard thread.

8 NIBB point grain weights are ±0.5 grain. All other components are ±1 grain.

9 This NIBB point will provide approximately an 8% F.O.C. All other NIBB points are approximately 7% F.O.C.

F.O.C. is Front-of-Center balance position on the arrow shaft.

10 Super UNI Bushing accepts Super, S, & 3D Super Nock.

11 X Nock UNI Bushing.

## ⚠ WARNING FOLLOW THESE INSTRUCTIONS TO AVOID PERSONAL INJURY. SEE WARNINGS AND USE @ [www.bsafe.ws](http://www.bsafe.ws) or 877-INFO-ETP.

### ARROW BREAKAGE

An arrow shaft can become damaged from impacts with hard objects or other arrows, or after being shot into a game animal. A damaged arrow could break upon release and injure you or a bystander.

**A DAMAGED ARROW SHOULD NEVER BE FIRED.** You

must carefully inspect each arrow shaft, nock and other components before each shot to see that they have not been damaged. Before shooting, place the arrow between your thumb and fingers, and using your other hand to slowly rotate the shaft, run your fingertips along the entire arrow length, feeling and looking closely for nicks, cracks, splits, dents, or other marks that could indicate the shaft has been damaged. If your arrow is crested, inspect for impact damage on the crest surface. If damage is present, remove the crest and inspect the shaft underneath the crest. If shaft damage is present, **DO NOT SHOOT THE ARROW. DISCARD THE SHAFT.**

When checking carbon arrows, perform the following additional tests:

1. Grasp the shaft just above the point and below the nock, then flex the arrow in an arc (bending it away from you and others) with a deflection of 1 to 2 inches (2.5 to 5 cm), and listen for cracking noises. Perform this



test four to six times, rotating the arrow slightly between each flex until you have gone around the entire arrow. If you hear or feel cracking, the carbon has been damaged.

**DO NOT SHOOT THE ARROW. DISCARD THE SHAFT.**

2. While still holding the point and fletching ends, twist the shaft in both directions. If the arrow "relaxes" or twists easily, the carbon has been damaged. **DO NOT SHOOT THE ARROW. DISCARD THE SHAFT.**
3. Following each shot inspect the nock to insure it is fully seated and still fits tightly in the shaft. Apply twisting pressure to see if the nock turns easily. If the nock has backed out of the arrow or the fit has become loose, inspect further for cracks in the nock end of the arrow shaft. If applicable, you may need to peel back the cresting to make a thorough inspection. If there are cracks in the shaft or the nock is loose (rotates easily) **DO NOT SHOOT THE ARROW. DISCARD THE SHAFT.**

If an arrow has been damaged, or if you believe

it has been damaged, do not shoot it again, as it could break on release, and sharp arrow pieces could hit and injure you or someone nearby.



### LIMITED WARRANTY

The Easton arrow shaft limited warranty covers any defects in material and/or workmanship for one year from date of purchase. It does not cover damage caused by impact from another arrow, impact with hard objects, improper cleaning or fletching, or from normal wear. Warranty does not apply if damage results from any non-compliance of printed instructions. Arrow shafts that are defective will be replaced by your local dealer or by Easton.



For information on arrow preparation and assembly, go to [www.eastonarchery.com](http://www.eastonarchery.com)







**EASTON®**

[WWW.EASTONARCHERY.COM](http://WWW.EASTONARCHERY.COM)

YouTube







8

7

6

**2013 TARGET**